


Programming the SR 10.1 after a S2 Upgrade


1. Open the SR 10.1 Editor for programming the remote. Click on update to update the program. If there is existing programming on the remote, click on Communications and then Upload. Then click on the B&K device. It may be labeled differently but it would be the button that would control the B&K preamplifier or receiver.




2. Open the IR database by going up to Program and then choice number 2 IR Database at the top of the program, as shown below.



3. Make sure the Device: states 'B&K' and the IR Data from: states 'B&K' like shown below. Select Brand: '50 S2, 505 S2, 507 S2' and then choose ID01 for default units. If the ID has been changed, please consult the preamplifier or receivers advanced menu for the code ID. If it has not been changed the ID would be 001.

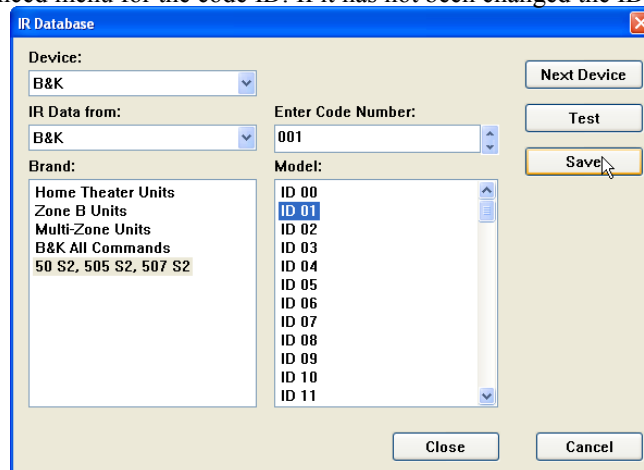

4. Click Save then OK when the page tree appears. Now, the functions on the four pages on the SR 10.1 would appear as below. The functions can be changed or moved as needed.

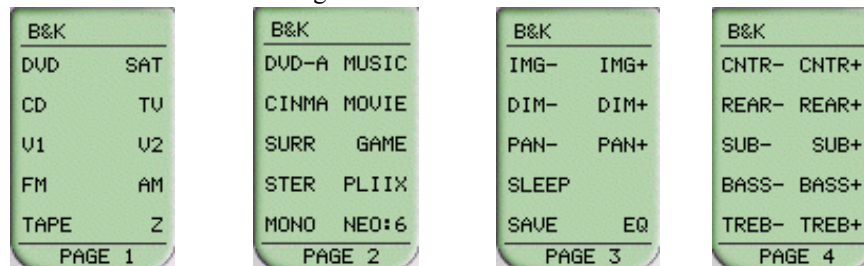

5. After programming is complete, click on Communications at the top of the program and then Download to send the file to the remote. For further information, please see the SR 10.1 programming manual.



Made in the U.S.A. 

Please call or visit us online at: www.bkcomp.com

B & K Components, Ltd., 2100 Old Union Road, Buffalo, New York 14227
800.543.5252 NY: 716.656.0026 Fax: 716.656.1291